

Q-Gard® Traction Shoe Cover

•Skid Resistance •ISO Class 5 Compatible •Low Linting •Chemical Light-Splash Resistant

The Q-Gard® **Traction** Shoe Covers feature a proprietary, state of the art sole. The **Traction** sole provides unparalleled skid resistance on both wet and dry surfaces.

Our Q-Gard® material is low linting and resistant to light splashes from non-hazardous chemicals. The elastic, color coded stitched ankles makes it easy for user to recognize the proper size.


The Q-Gard® **Traction** Shoe Covers were developed with the customer in mind, because our customers helped design them.



Applications:

- Pharmaceutical
- Asbestos, Lead & Mold Abatement
- Medical
- Utilities
- Clean Room
- Food Processing
- Manufacturing
- Painting
- Electronics
- Automotive
- General Maintenance

Traction non-slip sole

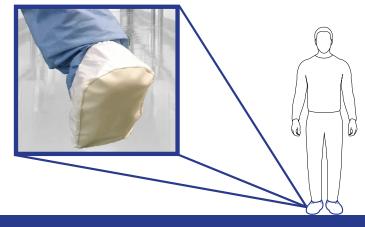

Property	Test Method	Quest Safety Q-Gard Traction	DuPont Tyvek Proclean	Kimberly-Clark Kleenguard
Breaking Strength - Grab	ASTM D5034	MD: 36LB/IN CD: 21LB/IN	MD: 30LB/IN CD: 20LB/IN	MD: 29LB/IN CD: 20LB/IN
Linting - Helmke Drum	IEST-RP-CC003.3	CAT II (1300P/MIN)	CAT II (4760-14800P/MIN)	CAT II
Burst Strength - Mullen	ASTM D774	32 PSI	32PSI	42.5 PSI
Basis Weight	ASTM D3776	1.5 OZ/YD2	1.8 OZ/YD2	-
Resistance to Ignition	16 CFR 1610	CLASS 1	CLASS 1	CLASS 1
Hydrostatic Head	AATCC 127	62	50	88.2

Traction Shoe Cover Details

21201 Small

21202 Medium

21203 Large/Universal

21204 X Large

traction sole, elastic ankle, color coded hem

Case UOM: 100 Pair







