




Q-Gard Barrierwear® & Q-Stik™ Shoe Covers

Serged Seams Dry Particulate Liquid Spray & Splash

Q-Gard **Barrierwear**® protective apparel is designed to be used in dry and wet environments where the main goal is stay clean, comfortable, and protect critical products. The unique physical properties offers a very breathable material without compromising filtration efficiency and protection. Low particle count of the material and clean manufacturing processes provide superior protection for your processes. The **Real World Design**® puts more material in high stress areas such as the shoulders, crotch, and seat, reducing blowout. Increase productivity and reduce cost.


- Clean Manufactured
- Low Linting
- Breathable
- ASTM F1670 Blood Borne Pathogen

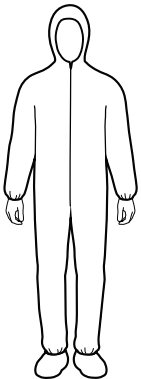


Coverall
3014_
zipper closure, hood and boot, elastic wrist ankles and back, white
Sizes: XL-6XL
Case Pack: 25




Coverall
2013_
thumb loops, zipper closure, elastic wrist ankles and back, white
Sizes: XL, 3X, 6X,
Case Pack: 25

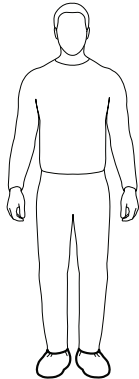

Shoe Cover
2020_
anti-slip coating, elastic ankle & sole, color coded hem, white
Sizes: Univ., 2XL
Case Pack: 200

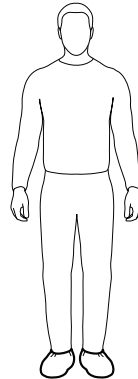

Shoe Cover
2020_T
anti-slip coating, elastic ankle & sole, color coded hem, **translucent**
Sizes: Univ., 2XL
Case Pack: 200

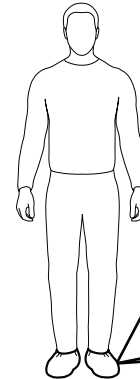


Shoe Cover
2120_
traction sole, elastic ankle, color coded hem, white
Sizes: M, Univ./L, XL
Case Pack: 200

Traction non-slip sole




Physical Construction

Serged Seam




Serged seams join two pieces of material with a thread that interlocks. This is an economical stitching method for general applications where dry particulates are a concern. Not for use for chemical protection.

Bound Seam



Bound seams join two pieces of material with an overlay of similar material and is chain stitched through all of the layers for a clean finished edge. This provides increased holdouts of liquids and dry particulate.


Taped Seam



Taped seams utilize a bound seam with the additional protection of a heat activated tape. This provides a liquid proof seam and is especially useful for chemical protective clothing.

Physical Property	Test Method	Units	Test Result
Basis Weight	ASTM D3778	gsm	50
Grab Tensile MD	ASTM D5034	lbs/in	32
Grab Tensile CD	ASTM D5034	lbs/in	23
Trapezoidal Tear MD	ASTM D5733	lbs/in	6.3
Trapezoidal Tear CD	ASTM D5733	lbs/in	10.7
Elongation MD	ASTM D5034	%	50
Elongation CD	ASTM D5035	%	50
Ball Burst	ASTM D1924	psi	33
Hydrostatic Head	AATCC 127	cm	50
Air Permeability	ASTM D 737	cfm	35
Static Decay - 50%RH	IST 40.2	sec	0.01

REAL WORLD SIZING CHART

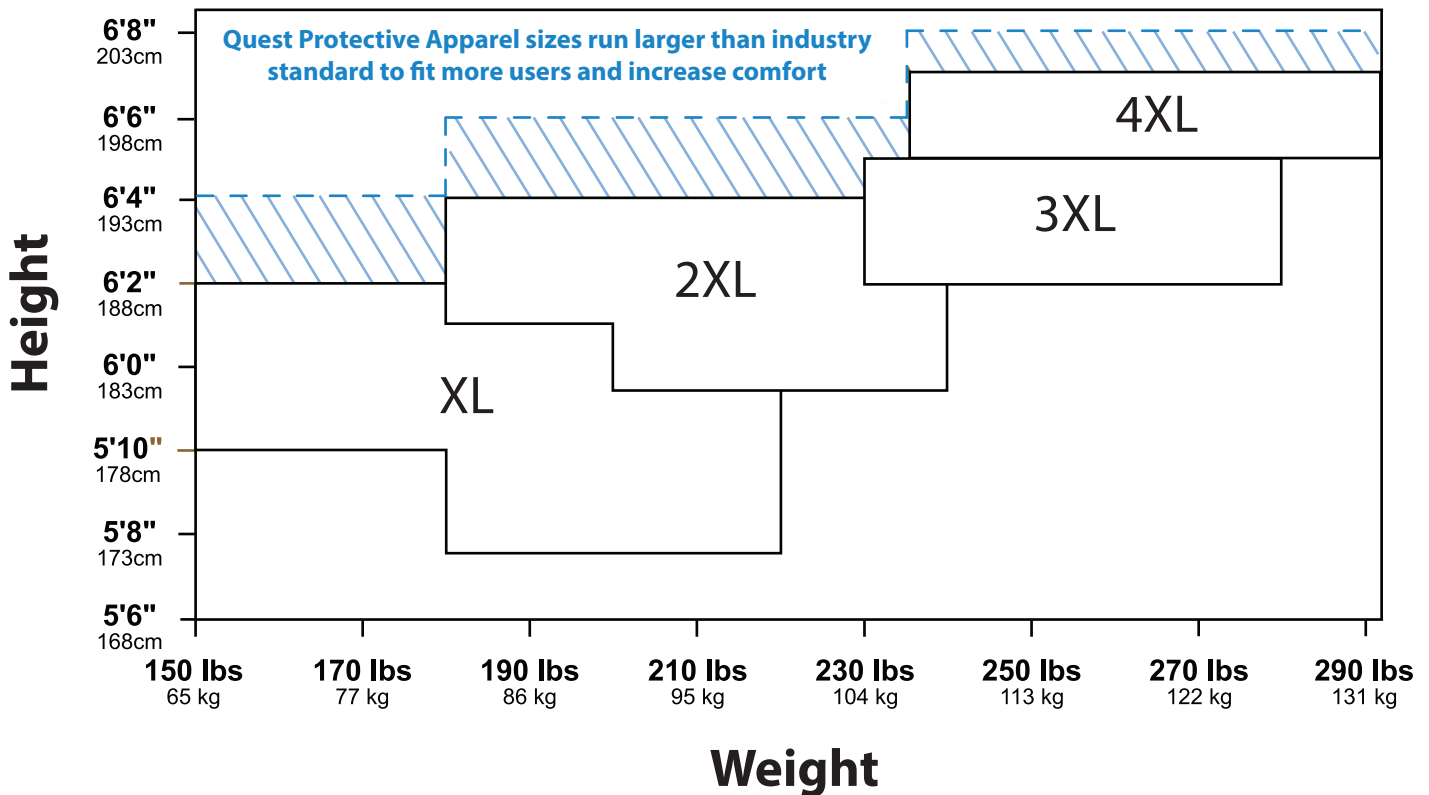

Call Now: 1.800.878.4872

Or visit

www.QuestSafety.com

