



# SPECIFICATION SHEET

## 148-1000

### TOP GRAIN GOATSKIN LEATHER PROTECTOR FOR NOVAX® GLOVES – DRIVER'S STYLE

- Top grain goatskin leather construction is the softest, most abrasion-resistant leather and is highly recommended for applications requiring tactile sensitivity
- Top grain leather is smooth, provides durability and dexterity
- Drivers gloves feature slip-on styling to provide good fit and comfort
- Keystone thumb is ergonomic, reduces hand fatigue, offers superior dexterity and durability
- Fourchettes between the fingers enhance the natural contour of the glove for a better fit
- Elastic closure sewn inside glove for safety and comfort
- Cotton color binding denotes sizing

### APPLICATIONS

- For use with Class 00-0 rubber insulating Novax® gloves. Cover glove to be used only for mechanical protection for rubber insulating gloves. Not to be used for electrical protection per ASTM F696-06 - 2011.

### TECHNICAL DATA

MATERIAL	100% Goatskin Leather					
COLOR	■ Natural					
CUFF STYLE	Slip On					
SIZES	7 - 12					
PACKAGING	12 pair per dozen, 72 pair per case					
CASE DIMENSIONS	7&8: 15.7" x 9.8" x 10.6" / 40cm x 25cm x 27cm 9: 16.5" x 9.8" x 10.6" / 42cm x 25cm x 27cm 10: 16.9" x 10.6" x 11" / 43cm x 27cm x 28cm 11&12: 17.1" x 10.6" x 11" / 43.5cm x 27cm x 28cm					
CASE WEIGHT	7	8	9	10	11	12
	15.4 lbs 7.0 kg	16.5 lbs 7.5 kg	17.6 lbs 8.0 kg	18.7 lbs 8.5 kg	19.8 lbs 9.0 kg	20.9 lbs 9.5 kg
COO	China					



### DIMENSIONS (in/cm)

	7	8	9	10	11	12
<b>A</b>	9.3 / 23.5	9.6 / 24.5	9.8 / 25	10 / 25.4	10 / 25.4	10 / 25.4
<b>B</b>	4.8 / 12.2	4.9 / 12.5	5.3 / 13.5	5.5 / 14	5.7 / 14.5	5.9 / 15
<b>H</b>	■ Sky Blue	■ Red	■ Green	■ Brown	■ Blue	■ Black

Leather Thickness: 0.8mm / Cuff Thickness: 1.6mm

### MAX USE VOLTAGE


CLASS	AC VOLTS	DC VOLTS
00 - 0	500 - 1,000	750 - 1,500

**10** NOVAX™ by G.B. INDUSTRIES  
ANSI / ASTM CLASS 00 TYPE I  
MAX USE VOLT 500V AC

**10** NOVAX™ by G.B. INDUSTRIES  
ANSI / ASTM CLASS 0 TYPE I  
MAX USE VOLT 1000V AC

### BARCODES

ITEM	BAG	DOZEN	CASE
■ 148-1000/7	---	01616314049094	02616314049093
■ 148-1000/8	---	01616314045553	02616314045552
■ 148-1000/9	---	01616314045560	02616314045569
■ 148-1000/10	---	01616314045577	02616314045576
■ 148-1000/11	---	01616314045584	02616314045583
■ 148-1000/12	---	01616314057846	02616314057845

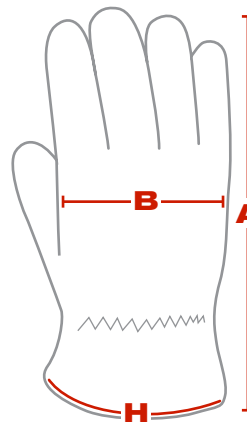

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.